



Connect • Innovate • Inspire

**Always On.
Always Connected.**

AXSFP-LCDP-1G-20

1G LC Duplex SFP Module 20 KM

AXSFP-LCDP-1G-20 Transceiver is a high performance, cost effective module which have a duplex LC optics interface. Standard AC coupled CML for high speed signal and LVTTTL control and monitor signals. The receiver section uses a PIN receiver and the transmitter uses a 1310 nm FP laser, up to 15dB link budge ensure this module 1000Base Ethernet 20km application.

Features

- Up to 1.25Gb/s Data Links
- Hot-Pluggable
- Duplex LC connector
- Up to 20km on 9/125µm SMF
- 1310nm FP laser transmitter
- Single +3.3V Power Supply
- Monitoring Interface Compliant with SFF-8472
- Maximum Power <1W
- Industrial /Extended/ Commercial operating temperature range: -40°C to 85°C/-5°C to 85°C/-0°C to 70°C Version available
- RoHS compliant and Lead Free

Applications

- Metro/Access Networks
- 1.25 Gb/s 1000Base-LX Ethernet
- 1×Fibre Channel
- Other Optical Links



www.axivo.co.in



Always On. Always Connected.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit
Storage Temperature	Ts	-40		+85	°C
Supply Voltage	Vcc	-0.5		4	V
Relative Humidity	RH	0		85	%

Recommended Operating Environment

Case Operating Temperature	Industrial				
	Extended	TC	-40	85	°C
	Commercial	TC	-5	85	°C
Supply Voltage	TC	0		+70	°C
Supply Current	VCC	3.135		3.465	V
Inrush Current	Icc			300	mA
Maximum Power	Isurge			Icc+30	mA
	Pmax			1	W

Electrical Characteristics (Top = -40 to 85°C, VCC = 3.135 to 3.465 Volts)

Parameter	Symbol	Min.	Typical	Max.	Note	Unit
Transmitter Section:						
Input Differential Impedance	Rin	90	100	110		
Single Ended Data Input Swing	Vin PP	250		1200		mVp-p
Transmit Disable Voltage	VD	Vcc – 1.3		Vcc	2	V
Transmit Enable Voltage	VEN	Vee		Vee+ 0.8		V
Transmit Disable Assert Time	Tdessert			10		us
Receiver Section:						
Single Ended Data Output Swing	Vout, pp	250		800	3	mv
LOS Fault	Vlosfault	Vcc – 0.5		VCC_host	5	V
LOS Normal	Vlos norm	Vee		Vee+0.5	5	V
Power Supply Rejection	PSR	100			6	mVpp

Note:

1. AC coupled, Or open circuit.
2. Into 100 ohm differential termination.
3. 20 – 80 %
4. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
5. All transceiver specifications are compliant with a power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the power supply filtering network shown on page 23 of the Small Form-factor Pluggable (SFP) Transceiver Multi-Source Agreement (MSA), September 14, 2000.

Always On. Always Connected.



Optical Parameters (Top = -40 to 85°C, VCC = 3.135 to 3.465 Volts)


Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transmitter Section:						
Center Wavelength	λ_c	1270	1310	1360	nm	
Spectral Width (RMS)	σ_{RMS}			3	nm	
Optical Output Power	P _{out}	-9		-3	dBm	1
Extinction Ratio	ER	8.2			dB	
Optical Rise/Fall Time	t _r / t _f			260	ps	2
Relative Intensity Noise	RIN			-120	dB/Hz	
Eye Mask for Optical Output	Compliant with IEEE802.3 z (class 1 laser safety)					
Receiver Section:						
Optical Input Wavelength	λ_c	1260		1360	nm	
Receiver Overload	P _{ol}	-3			dBm	4
RX Sensitivity	S _{en}			-24	dBm	4
RX_LOS Assert	LOS A	-35			dBm	
RX_LOS De-assert	LOS D			-25	dBm	
RX_LOS Hysteresis	LOS H	0.5			dB	
General Specifications:						
Data Rate	BR				Gb/s	
Bit Error Rate	BER		1.25	10 ⁻¹²		
Max. Supported Link Length on 9/125μm SMF@1.25Gb/s	LMAX		20		km	
Total System Budget	LB	15			dB	

Note:

- 1. The optical power is launched into SMF.
- 2. 20-80%.
- 3. Jitter measurements taken using Agilent OMNIBERT 718 in accordance with GR-253.
- 4. Measured with PRBS $2^{23}-1$ at 10^{-12} BER

Pin Assignment

Diagram of Host Board Connector
Block Pin Numbers and Name

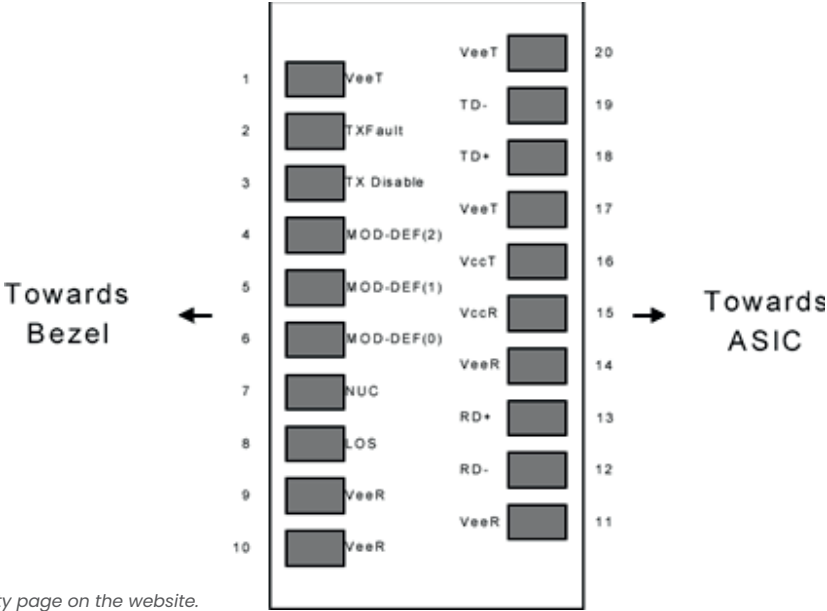

*Warranty will be subject to T&C specified in the Axivo product warranty page on the website.
*Specifications are subject to change without notice.

Pin Function Definitions

Pin No	Name	Function	Plug Seq	Notes
1	VeeT	Transmitter Ground	1	1
2	TX Fault	Transmitter Fault Indication	3	
3	TX Disable	Transmitter Disable	3	2
4	MOD-DEF 2	Module Definition	2	3
5	MOD-DEF 1	Module Definition 1	3	3
6	MOD-DEF 0	Module Definition 0	3	3
7	Rate Select	Not Connected	3	4
8	LOS	Loss of Signal	3	5
9	VeeR	Receiver Ground	1	1
10	VeeR	Receiver Ground	1	1
11	VeeR	Receiver Ground		1
12	RD-	Inv. Received Data Out	3	6
13	RD+	Received Data Out	3	6
14	VeeR	Receiver Ground	3	1
15	VccR	Receiver Power	2	1
16	VccT	Transmitter Power	2	
17	VeeT	Transmitter Ground	1	
18	TD+	Transmit Data In	3	6
19	TD-	Inv. Transmit In	3	6
20	VeeT	Transmitter Ground	1	

Note:


1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3. Should be pulled up with 4.7k - 10 kohms on host board to a voltage between 2.0V and 3.6V. MOD_DEF(0) pulls line low to indicate module is plugged in.
4. Rate select is not used
5. LOS is open collector output. Should be pulled up with 4.7k - 10 kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
6. AC Coupled.

SFP Module EEPROM Information and Management

The SFP modules implement the 2-wire serial communication protocol as defined in the SFP - 8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I²C interface at address A0h and A2h. The memory is mapped in Table 1. Detailed ID information (A0h) is listed in Table 2. And the DDM specification at address A2h. For more details of the memory map and byte definitions, please refer to the SFF-8472, "Digital Diagnostic Monitoring Interface for Optical Transceivers". The DDM parameters have been internally calibrated.

Table 1.

Digital Diagnostic Memory Map
(Specific Data Field Descriptions)

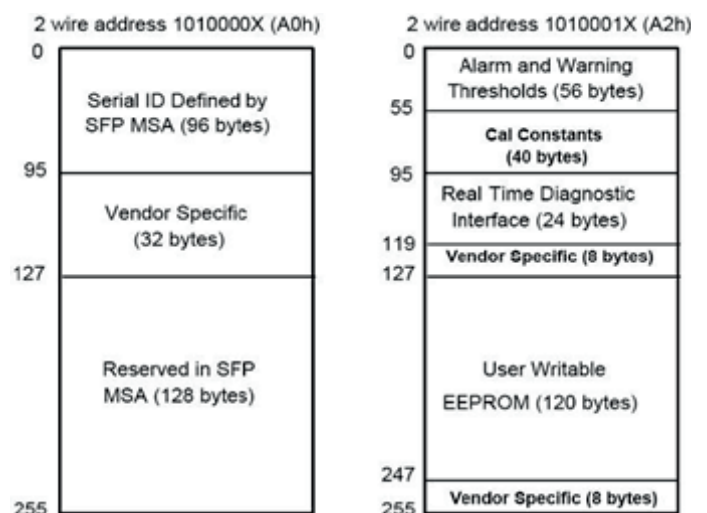

*Warranty will be subject to T&C specified in the Axivo product warranty page on the website.

*Specifications are subject to change without notice.

Always On. Always Connected.



Table 2 – EEPROM Serial ID Memory Contents (A0h)

Data Address	Length (Byte)	Name of Length	Description and Contents
Base ID Fields			
0	1	Identifier	Type of Serial transceiver (03h=SFP)
1	1	Reserved	Extended identifier of type serial transceiver (04h)
2	1	Connector	Code of optical connector type (07=LC)
3-10	8	Transceiver	
11	1	Encoding	NRZ(03h)
12	1	BR, Nominal	Nominal baud rate, unit of 100Mbps
13-14	2	Reserved	Reserved(0000h)
15	1	Length(9um)	Link length supported for 9/125um fiber, units of 100m
16	1	Length(50um)	Link length supported for 50/125um fiber, units of 10m
17	1	Length(62.5um)	Link length supported for 62.5/125um fiber, units of 10m
18	1	Length(Copper)	Link length supported for copper, units of meters
19	1	Reserved	Reserved
20-35	16	Vendor Name	SFP vendor name
36	1	Reserved	
37-39	3	Vendor OUI	SFP transceiver vendor OUI ID
40-55	16	Vendor PN	Part Number: "AXSFP-LCDP-1G-20" (ASCII)
56-59	4	Vendor Rev	Revision level for part number
60-62	3	Reserved	
63	1	CCID	Least significant byte of sum of data in address 0-62
Extended ID Fields			
64-65	2	Option	Indicates which optical SFP signals are implemented (001Ah = LOS, TX_FAULT, TX_DISABLE all supported)
66	1	BR, Max.	Upper bit rate margin, units of %
67	1	BR, Min.	Lower bit rate margin, units of %
68-83	16	Vendor SN	Serial number (ASCII)
84-91	8	Date Code	Manufacturing date code
92-94	3	Reserved	
95	1	CCEX	Check code for the extended ID Fields (addresses 64 to 94)
Vendor Specific ID Fields			
96-127	32	Readable	Specific date, read only
128-255	128	Reserved	Reserved for SFF-8079

Digital Diagnostic Monitor Characteristics

Data Address	Parameter	Accuracy	Unit
96-97	Transceiver Internal Temperature	±3.0	°C
98-99	VCC3 Internal Supply Voltage	±3.0	%
100-101	Laser Bias Current	±10	%
102-103	Tx Output Power	±3.0	dB
104-1015	Rx Input Power	±3.0	dB

*Warranty will be subject to T&C specified in the Axivo product warranty page on the website.

*Specifications are subject to change without notice.

Always On. Always Connected.


axivoTM
Connect • Innovate • Inspire

Regulatory Compliance

The AXSFP-LCDP-1G-20 complies with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following).


Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7	Class 1(>1000 V)
Electrostatic Discharge (ESD) to the Duplex LC Receptacle	IEC 61000-4-2 GR-1089-CORE	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2	Compatible with Class 1 laser product

Recommended Circuit

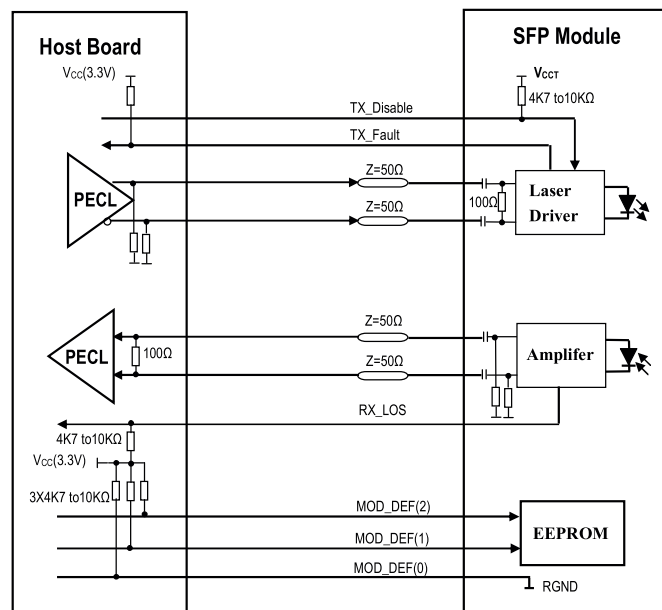

SFP Host Recommended Circuit

Mechanical Dimensions

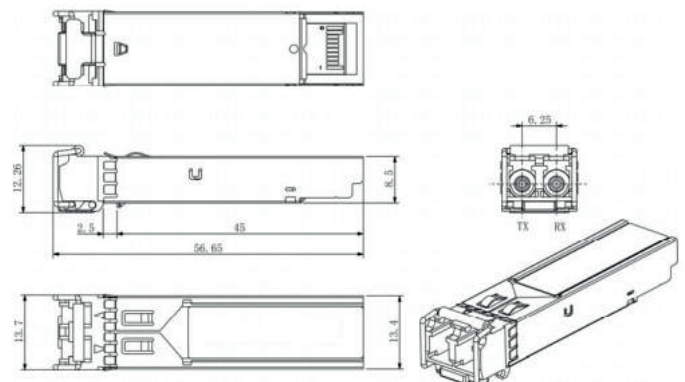

*Warranty will be subject to T&C specified in the Axivo product warranty page on the website.
*Specifications are subject to change without notice.

Axivo Networks Private Limited

📍 B-503, Shree Vallabh CHS Ltd., Poisur Gymkhana Road,
Kandivali West, Mumbai 400 067. Maharashtra. India.

📞 +91-859 148 2121 ✉ reachus@axivo.co.in 🌐 www.axivo.co.in